




DECKING TERAFFEST  
SMOOTH TEXTURE

## PROFILES WITH SMOOTH TEXTURE

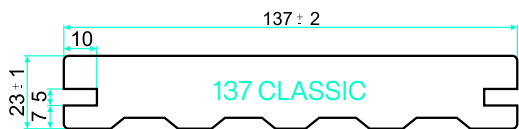

## PROPERTIES

profile	dimensions	stock length	custom length	weight
137 Classic	137 × 23 mm	4 m	2 - 6 m	3,4 kg/lm

Dimensional tolerance: length +/- 10 mm; width +/- 2 mm; thickness +/- 1 mm.

## COLOUR OPTIONS



The colour variants marked **+** have a unique color annealing, which breaks up the color monotony in the area and adds to the attractiveness of the decking.

# SMOOTH TEXTURE

## TECHNICAL PROPERTIES



### Technical properties according to ETA 23/0919\*

Basic characteristics	Standard	137 Classic Smooth
Reaction to fire	ČSN EN 13501-1	C <sub>fi</sub> -s1
Swelling in thickness	ČSN EN 317	2,4 %
Water absorption	ČSN EN 317	3 %
Bending strength	ČSN EN 310	28,6 MPa
Modulus of elasticity	ČSN EN 310	5114 Mpa
Impact strength	ČSN EN 477	20 J – pass
Slipperiness Dry (parallel/perpendicular)	ČSN P CEN/TS 15676	72/85
Slipperiness Wet (parallel/perpendicular)	ČSN P CEN/TS 15676	57/65
Pull-through strength of the fasteners	ČSN EN 1383	2,71 MPa
Moisture resistance under cyclic conditions (decrease in strength and modulus of elasticity)	ČSN EN 321	6 % 14,1 %
UV radiation resistance – before ageing – after ageing (1000h)	EN ISO 4892-2	2,58 kJ/m <sup>2</sup> 2,61 kJ/m <sup>2</sup>
Thermal expansion +30 až +80 °C	EAD čl.2.2.10	2,57*10 <sup>-5</sup> %
Surface hardness	ČSN EN 1534	63 N/mm <sup>2</sup>
Density	ČSN EN ISO 1183-1	1,21-1,24 g/cm <sup>3</sup>
Thermal conductivity	ČSN EN 12667	0,072 W/(m*K)

\* European Technical Assessment No. ETA 23/0919 of 21/12/2023 issued by Technical and Test Institute for construction Prague, on the basis of European Assessment Document EAD 190005-00-0402.

### Other technical properties

Characteristics	Standard	137 Classic Smooth
Antistatic properties	ČSN EN 1815	0,22/0,17 kV – pass
Migration of certain elements (Category III)	ČSN EN 71-3+A1	pass
Formaldehyde emissions	ČSN EN 717-1	< 0.028 mg/m <sup>3</sup> pass